

Davies Woven Wire Ltd.

38, The Factory Centre,
Woods Lane, Cradley Heath,
Warley, West Midlands B64 7AQ


Tel: 01384 411991

Fax: 01384 410999

Reg. No. 347 2100 VAT No. 705 3969 21

HONEYCOMB BELTING

Honeycomb's inherent strength and positive tracking make it suitable for a diverse range of applications in bakery, snack and general food processing.

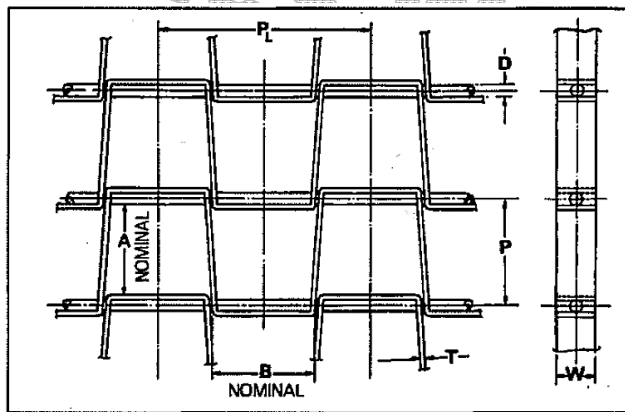

HIGH PERCENTAGE OF OPEN AREA

SUITABLE FOR DRYING / COOLING

HIGH STRENGTH FACTOR

POSITIVELY DRIVEN

LIGHTWEIGHT CONSTRUCTION

Belt Reference Numbers	Unit of Measure	Belt Type	P	PL	w	T	D	Nom. Wt. Per Sq.Ft / lbs Sq.M / Kg	Max. Working Tension lb / ft width Kg / M	
			Pitch Longitudinal	Pitch Lateral	Strip Width	Strip Thickness	Cross Rod Diameter			
A x B x W x T / D										
101	1081A	inch mm	1/2 x 1/2 x 3/8 x 18/11 12.7 x 12.7 x 9.5 x 1.2/3.0	0.506 12.65	1.140 28.95	3/8 9.52	0.048 (18swg) 1.2	0.116 (11swg) 3.0	5lbs 24.41kg	800 1190
	1081B	inch mm	1/2 x 1/2 x 3/8 x 18/11 12.7 x 12.7 x 9.5 x 1.2/3.0	0.54 12.85	1.140 28.95	3/8 9.52	0.048 (18swg) 1.2	0.116 (11swg) 3.0	5lbs 24.41kg	800 1190
102	1082A	inch mm	1 x 1/2 x 3/8 x 18/11 25.4 x 12.7 x 9.52 x 1.2/3.0	1.125 28.58	1.218 30.91	3/8 9.52	0.048 (18swg) 1.2	0.116 (11swg) 3.0	2.5lbs 12.21 kg	750 1116
	1082B	inch mm	1 x 1/2 x 3/8 x 18/11 25.4 x 12.7 x 9.52 x 1.2/3.0	1.084 27.53	1.198 30.43	3/8 9.52	0.048 (18swg) 1.2	0.116 (11swg) 3.0	2.5lbs 12.21 kg	750 1116
	1082C	inch mm	1 x 1/2 x 3/8 x 18/11 25.4 x 12.7 x 9.52 x 1.2/3.0	1.062 26.97	1.198 30.43	3/8 9.52	0.048 (18swg) 1.2	0.116 (11swg) 3.0	2.5lbs 12.21 kg	750 1116
103	1083	inch mm	1 x 1 x 3/8 x 18/11 25.4 x 25.4 x 9.52 x 1.2/3.0	1.125 28.58	2.062 52.37	3/8 9.52	0.048 (18swg) 1.2	0.116 (11swg) 3.0	2.25lbs 10.99 kg	850 818
104	1084A	inch mm	1 x 1/2 x 1/2 x 16/6 25.4 x 12.7 x 12.7 x 1.63/4.88	1.062 26.97	1.4 35.56	1/2 12.7	0.064 (16swg) 1.63	0.192 (6swg) 4.88	4lbs 19.53 kg	1850 2754
105	1084B	inch mm	1 x 1 x 1/2 x 16/6 25.4 x 25.4 x 12.7 x 1.63/4.88	1.062 26.97	2 50.8	1/2 12.7	0.064 (16swg) 1.63	0.192 (6swg) 4.88	3.7lbs 18.06 kg	1500 2233
106	1085	inch mm	1 x 1 x 5/8 x 16/6 25.4 x 25.4 x 15.87 x 1.63/4.88	1.125 28.58	2 50.8	5/8 15.87	0.064 (16swg) 1.63	0.192 (6swg) 4.88	4lbs 19.53 kg	1750 2605
107	1086	inch mm	1.1/2 x 1.1/2 x 5/8 x 16/6 38.1 x 38.1 x 15.87 x 1.63/4.88	1.5 38.1	3 76.2	5/8 15.87	0.064 (16swg) 1.63	0.192 (6swg) 4.88	3.1lbs 15.14 kg	
108	1088	inch mm	2 x 2 x 5/8 x 16/6 50.8 x 50.8 x 15.87 x 1.63/4.88	2.0 50.8	4 76.2	5/8 15.87	0.064 (16swg) 1.63	0.192 (6swg) 4.88	2.25lbs 10.99 kg	
109	1090	inch mm	3 x 3 x 5/8 x 16/6 76.2 x 76.2 x 15.87 x 1.63/4.88	3.0 76.2	6 152.4	5/8 15.87	0.064 (16swg) 1.63	0.192 (6swg) 4.88	1.5lbs 10.99 kg	

Materials Available:- Mild Steel and Range of Stainless Steel